

# TiO<sub>2</sub> coatings


## Introduction

Titanium oxide or titania (TiO<sub>2</sub>), in the form of nanocrystalline thin films and coatings, has within recent years found wide range of potential applications due to its interesting physical and chemical properties. TiO<sub>2</sub> forming the anatase crystal structure is known for its photocatalytic property upon UV-light exposure and hence capable of forming OH radicals and super oxides on the surface. Due to these properties TiO<sub>2</sub> is suitable for applications in self-cleaning and antibacterial coatings for industrial products.

The Tribology Centre is capable of deposition of TiO<sub>2</sub> thin film coatings either as rutile TiO<sub>2</sub> or anatase TiO<sub>2</sub> or a mixture hereof. The coating can be deposited on basically all types of substrate materials such as stainless steel, glass, copper, aluminium, silicon and different polymer-based substrates (e.g. PC, PMMA, etc.). In the case of polymer substrates it might be necessary to deposit a barrier layer between the photocatalytic coating and the underlying organic substrate to avoid degradation hereof. Substrate size is limited to a dimension corresponding to a cylinder with Ø400 mm and height 400 mm.

## Applications


Photocatalytic PVD TiO<sub>2</sub> coatings are well suited as protective coatings in applications where additional benefits can be obtained through self-cleaning, anti-bacterial effects upon UV-light exposure either from the Sun or through exposure to artificial UV-light. Thus could e.g. be in connection with medical applications where surfaces are UV-sterilized, outdoor lamps, signs, water or air cleaning units, cleaning units based on ozone (O<sub>3</sub>) or other clean-tech applications.

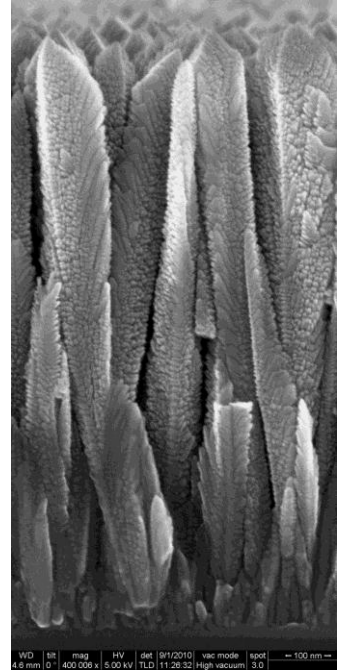

Cross section of an anatase TiO<sub>2</sub> coating seen with a scanning electron microscope. The coating thickness is about 1 µm.




The image shows TiO<sub>2</sub> coatings with different thicknesses on steel substrates. The different colours are due to interference effects caused by the different coating thicknesses.

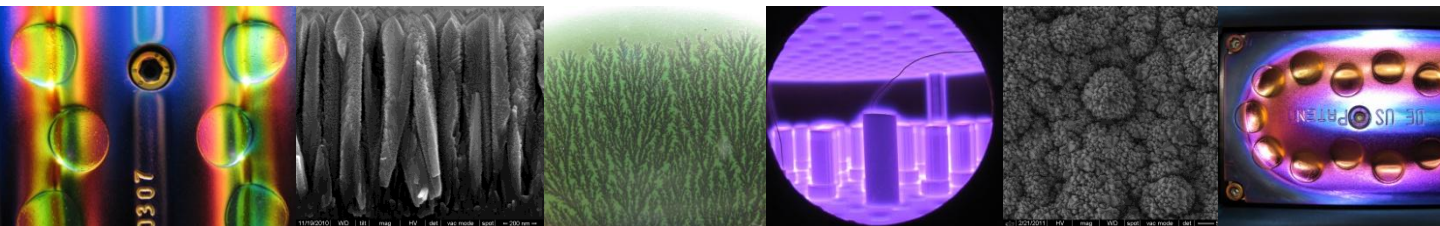


# Properties

<b>Deposition temperature</b>	50 - 600 °C
<b>Hardness</b>	2,5 GPa for anatase TiO <sub>2</sub> up to 15-20 GPa for rutile TiO <sub>2</sub>
<b>Thickness</b>	From 50 nm up to 3 µm
<b>Crystal structure</b>	Amorphous, anatase, rutile or mixtures hereof
<b>Chemical stability</b>	Stable under acid as well as alkaline conditions, especially when deposited at elevated temperatures
<b>Application temperature</b>	Depending on deposition parameters but thermally stable up to at least 600 °C
<b>Photocatalytic activity</b>	Depends of e.g. coating thickness as seen on the figure below
<b>Antibacterial properties</b>	99% reduction of bacterial activity (E. Coli) observed for anatase TiO <sub>2</sub> coatings on steel
<b>Colour</b>	Transparent. Depending on coating thickness interference colours appear

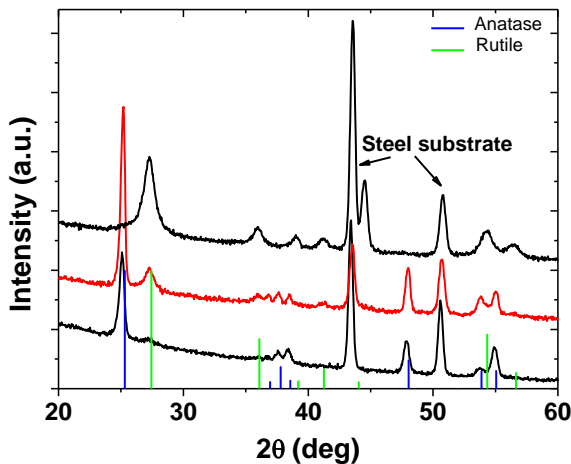

**X-ray diffractograms** from 1 µm TiO<sub>2</sub> coatings deposited on stainless steel substrate. The diffractograms reveals coatings consisting of the crystal phases anatase (bottom), anatase + rutile mixture (middle) and rutile (top), respectively.

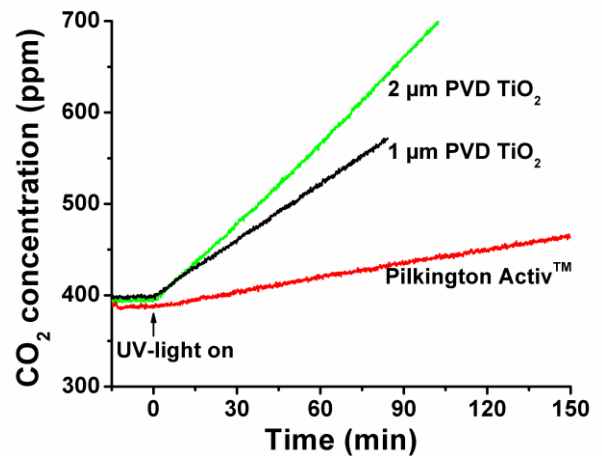

**Photocatalytic activity** can be measured by photocatalytic conversion of acetone to water and CO<sub>2</sub>. By measuring the increase in CO<sub>2</sub> concentration it is possible to evaluate the efficiency of degrading acetone and thereby the photocatalytic activity. The figure illustrates that 2 µm PVD TiO<sub>2</sub> is more active than 1 µm PVD TiO<sub>2</sub>, which is more active than Pilkington Activ™.

